


Die NY-A filters are depth filter cartridges with an absolute separation rate. They have a high dirt-holding capacity combined with low pressure drop. This is ensured by the unique and strictly controlled manufacturing process.

Main features

- Absolute separation rate
- Graduated density to clean side for maximum dirt holding capacity
- Increased porosity for higher flow rates and lower initial pressure drop
- Absolute micron rating from 1 µm to 180 µm
- (Beta Ratio 5000 from 1 to 20 µm)

Applications

- Food and beverages
- Pharmaceuticals
- Chemicals
- Electronics
- Cosmetics
- Water treatment
- Petrochemistry

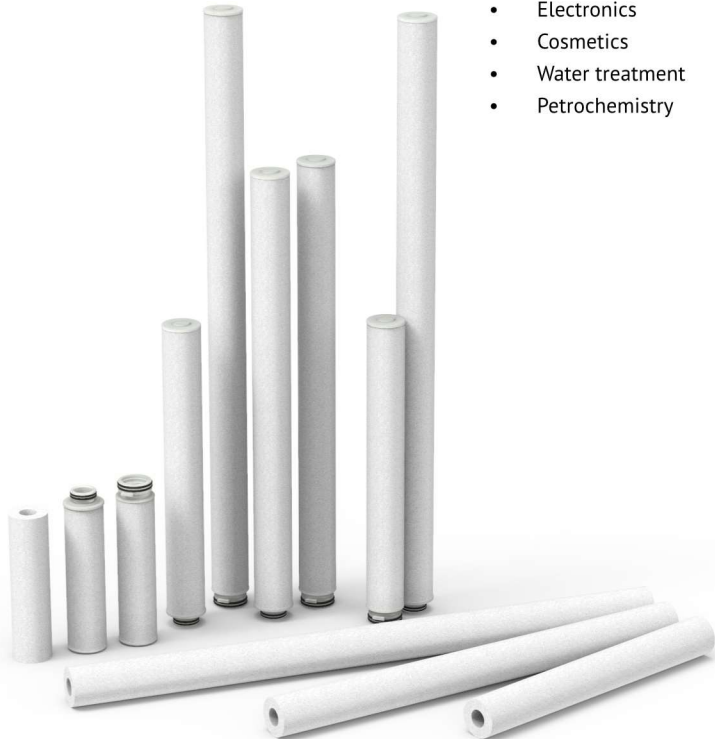

Technical data

Material:	Nylon
Micron rating:	1 µm to 180 µm
Length:	5" - 60"
Diameter:	27 mm inside 64 mm outside
Max. working temperature:	150°C
Max. working pressure:	4 bar at 50°C
Filter replacement:	Latest at 2,5 bar differential pressure
Gasket:	NBR, EPDM, Silikon, Viton, Silikon teflon-coated
Adapter:	DOE, Code 2, Code 3, Code 7, Code 8

Order information

NY-A

Adapter		Length		Micron rating		Gasket	
1	DOE	5	5"	010	1 µm	N	none
2	226/ Flat	93	9 3/4"	030	3 µm	B	NBR
3	222/ Flat	10	10"	050	5 µm	E	EPDM
7	226/ Fin	13	13"	100	10 µm	S	Silikon
8	222/ Fin	20	20"	200	20 µm	V	Viton
		30	30"	300	30 µm	F	Silikon, teflon coated
		40	40"	500	50 µm		
		60	60"	700	70 µm		
				900	90 µm		
				1200	120 µm		
				1500	150 µm		
				1800	180 µm		

Order example: NY-A-2-30-300-B